



**PROJECT
TELECOM**

UNIFYING COMMUNICATIONS

Advanced Noise Cancelling Wireless Bluetooth Headset



USER GUIDE

Specifications

Pairing Name: M800BTD

Bluetooth Specification: CSR8635, V4.1, dual mode, downward compatible.

Frequency Range: 2402-2480MHz

Modulation: GFSK, $\pi/4$ DQPSK, 8DPSK

Two Bluetooth devices can be connected at the same time.

Transmission Distance: up to 20 meters (Transmission distance varies depending on the environment and Bluetooth device)

Maximum Talk Time: 12 hours

Standby Time: 250 hours

Speaker:

Resistance: 32 ohms

Frequency: 20Hz-20KHz, Hi-fi

Sensitivity: 115dB \pm 3dB

Distortion: \leq 1%

Microphone:

Microphone: Noise Canceling

Sensitivity: -38dB \pm 3dB

Crystal clear sound and voice (DSP)

Headset Battery:

Type: Lithium-ion polymer

Capacity: 145mAh per hour stand

Battery Capacity: 150mAh

Charging Voltage: 5V DC

Life Time: Minimum recharging 1000 times

Operating Temperature: -10°C to +60°C

Charging Time: 2 hours


Charging interface: Micro USB

Charging Base

Size: 74.7*74.7*52mm Net Weight: 105g

Net Weight:

M800BT Mono 46.5g M800BT Duo 58.2g

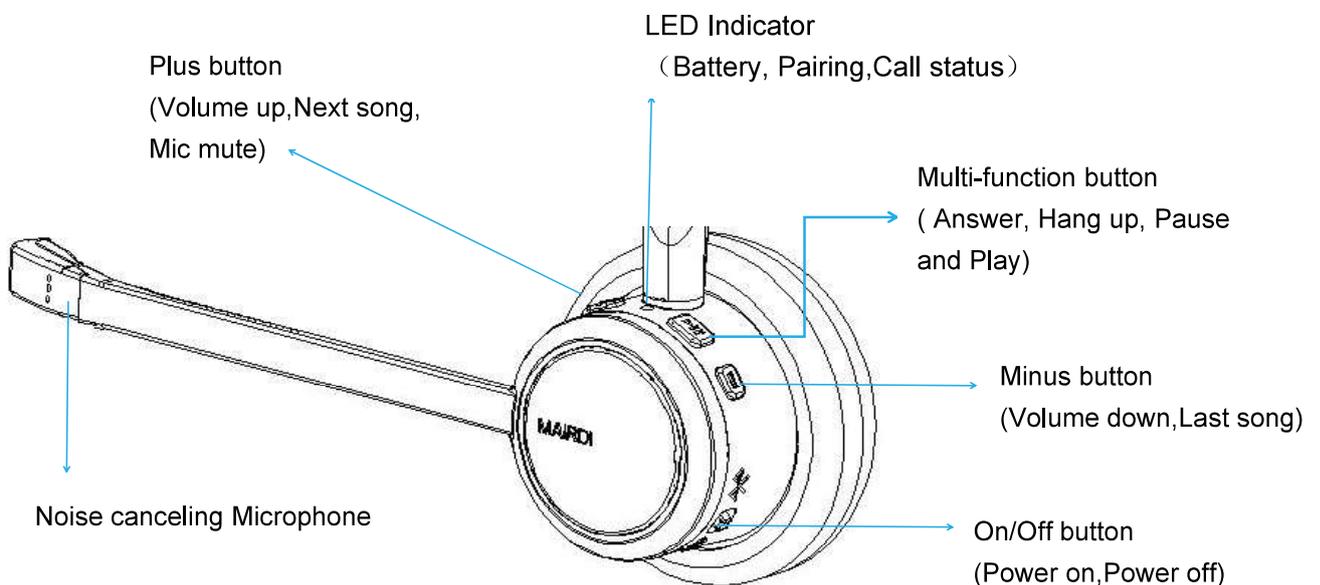

Pairing with Bluetooth Device

1. Be sure that your smart phone, laptop or desk phone with Bluetooth function.
2. Activate the Bluetooth function on your smart phone, laptop or desk phone.
3. Turn on your headset (slide switch to icon “- 1) Search Bluetooth device on your smart phone, laptop or desk phone.
- 2) Open “Bluetooth” menu and press “discover” or “add” to search M800BT on your smart phone, laptop or desk phone.
- 3) When M800BT shows on your Bluetooth devices list, please click it to start pairing.
Prompt tone “connect” will be heard when pairing is successful, and the LED indicator will repeatedly flash blue every 5 seconds.
- 4) The second time to use this headset on your Bluetooth device, it will pair with your Bluetooth device automatically when turn on the headset and Bluetooth device.

Button Function:

Button	Function	Action		
On/Off Button	Headset on	Slide switch to icon “  Plus Button	Volume up	Tap the Plus button to increase the speaker volume
	Next song	Long press the Plus button to switch to next song when playing music		
Mic mute	Long press the Plus button for 2 seconds to activate mic mute during a call, repress the Plus button for 2 seconds to cancel mic mute.			
Minus Button	Volume down	Tap the Minus button to decrease the speaker volume		
	Last song	Long press the Minus button to switch to last song when playing music		
Multi-function Button	Pause	Tap the Multi-function button when playing music		
	Answer /end call	Tap the Multi-function button		
	Reject call	Long press the Multi-function button for 2 seconds.		

Headset LED Indicators

Headset Status	LED Status
Pairing Mode	Light flashes blue and red alternately
Pairing Successfully	Light flashes blue repeatedly every 5 seconds
Battery Low	Light flashes red continuously
Charging Mode	Red light continuously on
Fully Charged	Blue light continuously on

Prompt Tone Introduction

Headset Status	Tone
Power on	Power on
Power off	Power off
Pairing Successfully	Connect
Volume up/down	"toot"
Battery Low	"toot" every 5 minutes
Mic Mute	"toot" every 3 seconds

Function Introduction:

1. Pair with 2 devices simultaneously

M800BTD can pair with 2 devices simultaneously.

- 1) Connect the first device with M800BTD
- 2) Turn off the Bluetooth function of the first device
- 3) Connect the second device with M800BTD
- 4) Turn on the first device's Bluetooth function, then M800BT is paired with both devices.

2. Redial function

Quick press the multi-function button twice to redial the last call.

3. One-touch play function

Press the multi-function button once, the default music player of the mobile phone will play automatically (some mobile phones cannot implement this function).

4. Automatic re-connection function

Bluetooth connection can be automatically re-connected even if disconnected within 5 minutes in the effective distance. If reconnect fails, please turn off the headset and turn it on again to reconnect.

5. Mic mute function

Long press the plus button for 2 seconds to activate mic mute during a call, repress the plus button for 2 seconds to cancel mic mute. The tone "toot" will be heard every 3 seconds during mic mute status.



Cautions:

1. Most mobile phones have headset power on screen display. When headset battery low, the headset will beep and the indicator will turn red. Please charge it in time.
2. Do not connect the charged headset to the charging circuit for a long time. Overcharging will shorten battery life.
3. Please keep the headset battery safely. Do not put the battery or the headset into fire or water to avoid explosion.
4. Do not use headset with high volume for extra long time, which may cause hearing loss. Always listen at a moderate level.
5. Do not connect the high voltage device to charge, which may cause damage to the headset.
6. Make sure that the headset is fully charged before using it if long time no use.
7. Lifetime of the battery will be significantly reduced if your device is left uncharged for a long time. We therefore recommend that you recharge your device at least once a year.

Product Warranty Card

Customer Name		Product Model No.	
Date of Purchase		Tel No./E-mail:	
Problem Description:			
Microphone	Speaker	Battery	Buttons
Warranty: Failure of headset buttons, speaker or microphone; charge unavailable. Out of Warranty: 1. Ear cushions broken. 2. Fail to follow the user manual or disassemble the headset. 3. Incorrect connect with high voltage device for charging which causes earphone damage. 4. Artificial damage caused by impact, falling, water, pulling.			
OQC CHECKING			

Warning

Any Changes expressly or modifications not approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.