



USER GUIDE

FOR RA708 SERIE
CB TELEPHONE

GENERAL

The RA708 type weatherproof telephone from DAC Limited is designed to provide a reliable communications terminal for many arduous communications applications.

This telephone has been designed for use with certain types of Central Battery manual exchanges.

The telephone can be connected as an extension, on certain types of PBX [see details under 'line connections'] or via a standard BT telephone socket, where the CB feature has been enabled.

MOUNTING OPTIONS



Wall Mounting

Use reducing washers [supplied as part of installation kit] to affix to wall through telephone backplate.



Top of Pole Mounting

Top of pole mounting bracket available from DAC Limited



Pole or Post Mounting

Use pole mounting adaptor bracket [supplied as part of installation kit] and band at required height on pole

LINE CONNECTION


The number of telephones that can be connected to a direct exchange line PBX is limited to the ringer equivalence number [REN] of all the telephones connected, which should not exceed a total value of 4. The REN value of this telephone is 1. In case of doubt please contact your telephone supplier.

The following information is provided for use by your approved telephone installer or network supplier.

Terminal Connections

B - Line [B]

A - Line [A]

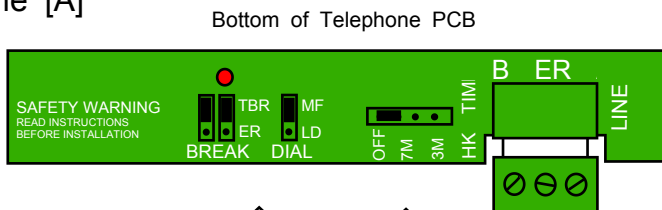

Dialling & Recall mode.
Default - MF & TBR




Off-Hook Timer options
Default - OFF



Earth Bonding

The earth bonding point is on the rear of the telephone.

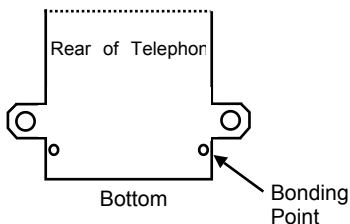

Available options:

- 1 Armoured Cord Handset
- 2 Padlock Hole in door
- 3 Latching Door
- 4 Telephone logo
- 5 Installation kit
- 6 Top of pole mounting kit
- 7 Yellow or Grey colour

Distributor:

DAC Limited, Unit 214a Lomeshaye Business Village, Turner Roa
Nelson, Lancashire. UK. BB9 7DR

Tel: +44 (0) 1282 447000 Fax: +44 (0) 845 280 1915

www.daclimited.co.uk