

Yealink

T48S

Dual port Gigabit Ethernet, Power over Ethernet

7" 800 x 480-pixel colour touchscreen with backlight

HD Voice: HD Codec, HD speaker, HD handset

16 VoIP accounts, BLF/BLA, IPV6, Open VPN

Supports Bluetooth Headsets & WiFi dongle

T4S Unified firmware and auto-provisioning

USB call recording

Hearing Aid Compatible



PoE

The T48S is an elegantly designed IP phone for executives and busy professionals. The large, 7" coloured touchscreen provides rich visual presentation and simple navigation through a wealth of productivity enhancing features.

As well as support for corded and wireless headsets, the T48S also incorporates a USB port allowing Bluetooth headsets (via BT40 Bluetooth dongle), WiFi access (via WF40 WiFi dongle) and call recording. Auto provisioning and manual programming follow the same format as the rest of the Yealink range, making life simpler for installers and technicians. The T48S is certified compatible with 3CX, Asterisk and BroadSoft BroadWorks and many more IPPBX and hosted platforms, making it the ideal choice for busy managers.

Yealink

T48S

T48S Accessories

BT40 Bluetooth Dongle
Provides functionality for Bluetooth headsets



WF40 WiFi Dongle
Enables connectivity to wireless networks



EXP40 Expansion Module
Adds 40 more feature keys (2 pages of 20). Up to 6 expansion modules can be added.



EHS36 Electronic Hookswitch Adapter
Enables support for Plantronics, Jabra and Sennheiser DECT cordless headsets



YHS33 Headset
Lightweight over-the-head monaural headset



Audio Features

- > HD voice: HD handset, HD speaker
- > Hearing aid compatible (HAC) handset
- > Codecs: Opus, G.722, G.711(A/μ), G.723.1, G.729AB, G.726, iLBC
- > DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- > 16 VoIP accounts
- > Call hold, mute, DND
- > One-touch speed dial, hotline
- > Call forward, call waiting, call transfer
- > Group listening, emergency call
- > Redial, call return, auto answer
- > 3-way conferencing
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Set date time manually or automatically
- > Dial plan, XML Browser, action URL/URI
- > RTPC-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > USB port (2.0 compliant) for: Bluetooth earphone through BT40, Wi-Fi through WF40, USB call recording through USB flash drive
- > Enhanced DSS key

Directory

- > Local phonebook up to 1000 entries
- > Black list
- > XML/LDAP remote phonebook
- > Smart dialing
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

IP-PBX Features

- > Busy Lamp Field (BLF)
- > Bridged Line Appearance (BLA)
- > Anonymous call, anonymous call rejection
- > Hot-desking, voice mail
- > Flexible seating

- > Call park, call pickup
- > Executive and Assistant
- > Centralized call recording
- > Visual voice mail
- > Call recording

Display and Indicator


- > 7" 800 x 480-pixel color touch screen with backlight
- > 24 bit depth color
- > LED for call and message waiting indication
- > Wallpaper
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name, number and photo
- > Screensaver
- > Power saving

Feature Keys

- > 29 one-touch DSS keys
- > 7 features keys: message, headset, hold, mute, transfer, redial, hands-free speakerphone
- > 6 navigation keys
- > Volume control keys
- > Illuminated mute key
- > Illuminated headset key
- > Illuminated hands-free speakerphone key

Interface

- > Dual-port Gigabit Ethernet
- > Power over Ethernet (IEEE 802.3af), class 3
- > 1 x USB port (2.0 compliant)
- > 1 x RJ9 (4P4C) handset port

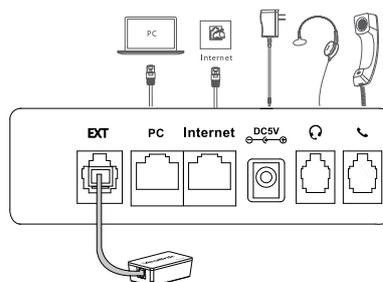

- > 1 x RJ9 (4P4C) headset port
- > 1 x RJ12 (6P6C) EXT port: Supports up to 6 Expansion Modules for an attendant console application

Other Physical Features

- > Wall mountable (optional)
- > External Yealink AC adapter (optional): AC 100~240V input and DC 5V/2A output
- > Power consumption (PSU): 2.23-7.29W
- > Power consumption (PoE): 3.19-10.78W
- > Dimension (W*D*H*T): 266mm*226mm*185mm*54mm
- > Operating humidity: 10~95%
- > Operating temperature: -10~50°C

Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP
- > Zero-sp-touch, TR-069
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log

Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP/PPPoE
- > HTTP/HTTPS web server

- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV(RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- > SRTP for voice
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication using MD5/MD5-sess
- > OpenVPN, IEEE802.1X
- > IPv6
- > LLDP/CDP/DHCP VLAN
- > ICE

Package Features

- > Package content:
 - Yealink SIP-T48S IP phone
 - Handset with handset cord
 - Ethernet Cable (2m CAT5E UTP Cable)
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
 - Wall Mount Bracket (Optional)
- > Qty/CTN: 5 PCS
- > N.W/CTN: 8.2 kg
- > G.W/CTN: 9.0 kg
- > Giftbox size: 324mm*263mm*128mm
- > Carton Meas: 660mm*338mm*273mm

Compliance



Yealink