

Premium Long Range Two Way Radio



The Project Telecom Premium Long Range Two Way Radio series delivers a host of advanced DMR digital radio features and high-end performance in a compact and convenient form-factor, the needs of every type of user have been considered.

The Project Telecom Premium Long Range Two Way Radio introduces an informative display, simple text messaging and advanced calling options.

By sharing a common chassis design and wide range of accessories, organisations can enjoy the benefits of shared battery and charging solutions, whilst providing different users with the most suitable device for their specific needs. Four benefits of Project Telecom digital radios:

- Double channel capacity
- More effective communication
- Improved communication coverage
- Improved operating times

Advanced digital processing allows us to double the communication capacity of a conventional radio channel and allowing two simultaneous conversations.

Calls can be directed to specific groups or individual radios - ensuring privacy and minimising disturbance to other users.



Missed the last message...

Incoming calls are automatically recorded* on your radio and can easily be replayed. Unless deleted, the last 256 calls or 2 hours of communication are saved.

Migrating from analogue...

All models can be programmed with both analogue and digital channels giving you full compatibility with legacy radio systems for painless migration.

Need to alert your users...

Each of the programmable buttons can be configured to send a text message to a preset group of users for fast, informative messaging. Ergonomic design and quality construction throughout...

From the moment you pick-up your Project Telecom Premium Long Range Two Way Radio you will notice the quality. The convenient size. The reassuring, well-balanced weight. The tactile and well-placed controls - comfortable for both left and right handed use. The satisfying click as you turn on the device and the perfect torque of the channel selector - ensuring precise volume control and confident channel selection.

The quality plastics and alloy chassis are produced to high tolerances, resulting in a radio that is IP65 rated against dust and water ingress. Built to survive the rigours of everyday use in a wide variety of harsh environments.

Operationally, your system supplier has control over many of the device settings and features, allowing them to tailor each device to meet your precise requirements. Assigning different features to the controls, setting up your users and talk-groups. Even customising the radio announcements, tones and messages.

Enhanced Privacy

Digital radio is inherently more secure than analogue radio. For even greater security, the D10 series features additional levels of encryption.


Keep your staff safe and protect lone-workers...

With three emergency alerting methods, Project Telecom Premium Long Range Two Way Radio series is the ideal choice for vulnerable staff or those working in high risk situations.

The panic button can be used to summon help immediately, whilst the lone-worker and mandown alerts can automatically trigger emergency alerts to other users in the event of an accident or incapacity. Display-equipped models helpfully identify the user in distress.

Benefit from a display...

The clear and uncluttered backlit display of the Project Telecom Premium Long Range Two Way Radio gives the user additional useful information, such as the channel name, caller identity and battery level. The user is also able to access the radios menu system, to make private calls to specific radios, send text messages, change channel group (zone), view the call log and change personal device settings.

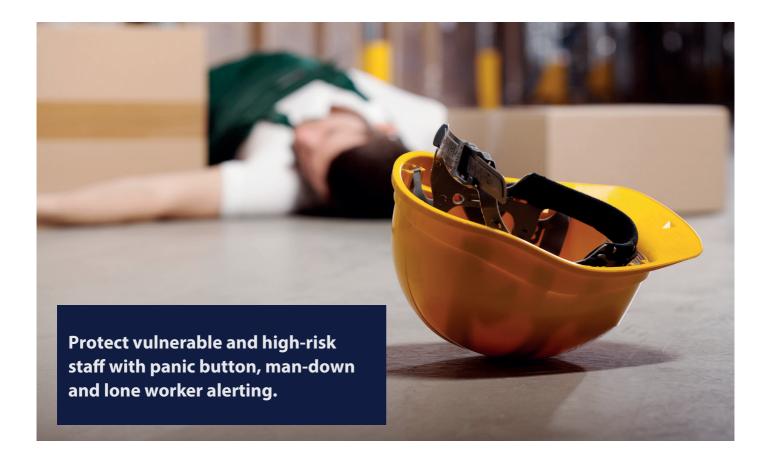

Key Features

- Compact Size
- Light weight
- Three Design Options
- Voice recording
- Man-Down Alerting
- Lone-Worker Alerting
- Panic Button Alerting
- Easy-to-read display
- Motorola 2-Pin Audio Jack
- Dual-function Programmable Function Buttons
- Simple to operate
- Six 'one touch' actions, such as sending a text or calling a specific user
- Up to 50 Preset 'Quick Text' messages
- IP65 Ingress Protection
- 'Easy Trunk' dynamic slot selection*
- Voice announcement alerts*
- High capacity LilON battery
- Firmware Upgradeable

SPECIFICATIONS

General

Power Supply		7.5VDC ±20%
Frequency Coverage	136~1	74, 400~470 MHz
Channel Spacing		12.5kHz/25kHz
Channel Capacity		2000
Maximum Zones		250
Channels per Zone		999+1
Operating Temperature		-30~+60°C
Dimensions (H x W x D) (with	n standard battery)	96.5 x 54 x 33mm
Weight (with standard battery)		245g
Battery life (5:5:90)	14hr Digital Mode/11hr Analogue Mode	

Transmitter

RF Power	Low: 1W, High: 4W (UHF), 5W (VHF)	
Frequency Stability	1.0ppm	
Modulation Limiting	±2.5kHz@12.5kHz	
FM Hum & Noise	-40dB@12.5kHz/-45dB@25kHz	
Conducted/Radiated Emission	-36dBm<1 GHz, -30dBm>1 GHz	
Adjacent Channel Power	-60dB@12.5kHz/-70dB@25kHz	
Adjacent Transient Channel Power -5		
FM Modulation Mode	12.5KHz: 11 K0F3E/25KHz: 16K0F3E	
4FSK Digital Mode	12.5KHz (data only): 7K60FXD	
	12.5KHz (data+voice): 7K60FXE	
4FSK Modulation Accuracy	5%@25°C, 10%@extreme temperature	
Audio Response (300-3000Hz)	+1~-3dB	
Digital Protocol	ETSI TS 102 361-1, -2, -3	
Audio Distortion	<3%	
Vocoder	AMBE+2™	
Ext. Microphone Connector	MOTO 2-pin	

Receiver

Analogue Sensitivity	0.35µV/-116dBm (20dB SINAD)
	0.22μV /-120dBm (12dB SINAD)
Digital Sensitivity	0.22 μ V/-120dBm (BER 5%)
	0.25µV/-118dBm (BER 1%)
Intermodulation	TIA603 70dB; ETSI 65dB
Adjacent Channel Selectivity	TIA603C 70dB; TESI: 70dB@25kHz
	TIA603C 60dB; TESI: 60dB@12.5kHz
Spurious Rejection	TIA603C: 75dB; ETSI: 70dB
Blocking	84dB
Rated Audio	750mW/1000mW
Audio Distortion@Rated Audio	3%
Audio Response (300-3000Hz)	+13dB
Conducted Spurious Emission ETS300086	-57dBm<1GHz, -47dBm>1GHz

