

PT-E | Noise Cancelling USB Speakerphone




1. Package Content



2. Product introduction

USB Speaker Phone is ideal for one-to-one and small-group conference calls. Plug and play, easy to use with dedicated answer, volume control, and mute button. Crystal-clear conversations during online calls with far field Mic, noise reduction and echo cancellation. Compatible with Windows Microsoft Communicator and Microsoft Teams.

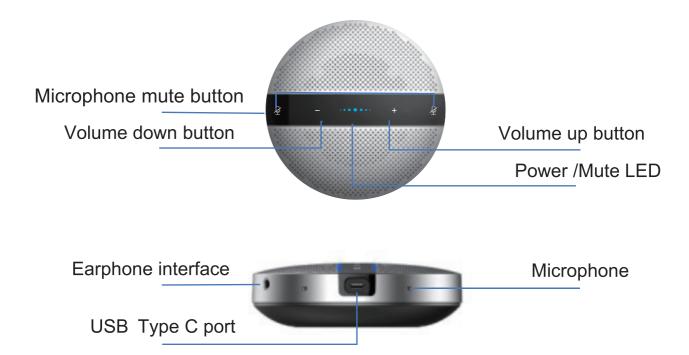

3. How to operate

ICON	FUNCTION	OPER
4	Mute/unmute	Tap this
+	Turn up the volume	Тар "+"
-	Turn down the volume	Тар "-"

4.Product Specification

SPEAKERPHONE SP300U	SPECIFICATION	
Microphones	6 Omni-directional Amics	
Speaker	4Ω,3W, Φ40mm	
RMS	2W	
USB Type C port	Charging and data connection	
Pickup distance	3m	
Dimensions	D 130mm x H 38.2mm	
Weight	198g	
Connectivity	USB2.0	
Operating temperature	5°C to 40°C (41°F to 104°F)	
Storage temperature	-5°C to 60°C (23°F to 140°F)	

Warning

Only could be used in areas below 2000 meters above sea level; Only applicable o non-tropical climate conditions.

5.FAQ & Solutions:

1) Question: Does this speakerphone work well with Mac or Chrome OS?

Answer: Works perfectly. Before you use USB speakerphone in Mac/Chrome system, you need to set the speakerphone as the sound in and out option in computer system preferences.

2) Question: Is there any adapter or proper cable suitable for connecting this USB speakerphone to telephone?

Answer: No, this USB speakerphone is only suitable for computer/laptop, this product does not work with traditional telephone.

3) Question: What is the conferencing range of this USB speakerphone?

Answer: The speakerphone could pick up voice from 3-5 meters' range, and it is also perfect for 3-5 attendees meeting.

4) Question: Does it work with smart phone or mobile?
Answer: No. This product is not a Bluetooth speakerphone with Bluetooth connection function. It only works with computer or laptop with USB port.

6.Warranty

All our products come with one full year warranty from the date of purchase (accessories are out of warranty). It will be out of guarantee if damaged due to incorrectly use or force majeure.

THE FUNCTION DESCRIBED IN THIS MANUAL IS BASED ON TESTING MADE BY OUR FACTORY. SPCIFICATION AND DESIGN MAY BE CHANGED WITHOUT FUTURE NOTICE.